


1. Brief

The FB4686x is an easy to use SATA to CompactFlash adapter board. It provides 1 standard SATA connector for connecting to CPU boards. This quick setting provides the jumper settings, connector location, and their pin assignment.

2. Board Placement

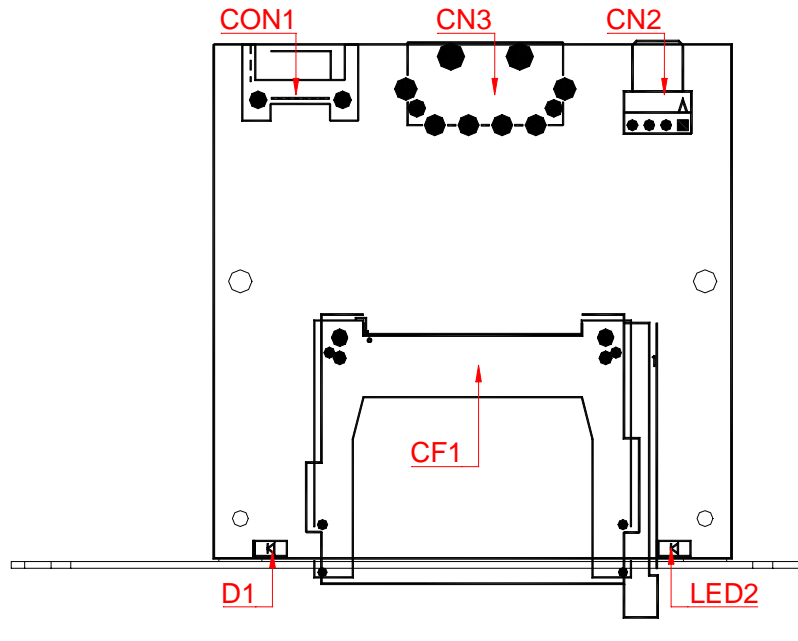

3. Packing List

- 1 FB4686x CompactFlash adapter board with anti-static bag.
- 1 hard copies of this quick setup manual.

4. Features

- * Fully SATA to ATA mode CompactFlash compatibility.
- * Supports 1 SATA and 1 power connectors.
- * On-board 5V to 1.8V and 3.3V regulator.
- * On-board LED for access indicating.
- * Board size: 78 mm x 78 mm.

5. Jumpers and Connectors

A. SATA Connector (CON1)


B. Power and Access LED (D1, and LED2)

D1 is the on-board power LED (optional item) and LED2 will blinking when accessing the on-board CompactFlash modules.

C. CompactFlash Connector (CF1)

D. Power Connector (CN2 and CN3)

CN2 is the main power connector for on-board circuits and CompactFlash modules. CN3 (optional item) is reserved for another way power inputs.

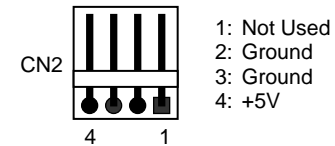

End of Document